1 1/8" thick (30mm) porcelain pavers





### index

- 01\_ T30 introduction
- 03 technical characteristics
- 05\_ installation options
- 06\_ applications & uses
- **08**\_ color & size options
- 09\_ T30 collection
  - 09\_ areas
  - 11\_ bagnolo
  - **13**\_ base
  - 14\_ basic ginevra
  - 15\_ bluestone grey
  - 17 cemento smoke
  - **19**\_ mons
  - 21\_ moov grey
  - 23 moov moka
  - 25\_ pietra barge
  - 27\_ pietra basalto
  - 29 slate black
  - **30**\_ titanio
- 32\_ technical specifications





#### three times stronger

With almost three times the breaking strength of 3/4" thick porcelain pavers, but just 1/2" thicker, Archatrak T30 pavers offer a notably superior solution for constructing pedestal supported elevated decks in high traffic commercial spaces such as restaurants, bars, roof terraces, patios and other communal areas.

#### made in Italy

T30 porcelain pavers are manufactured in Italy using cutting-edge and environmentally sustainable technologies. Every phase of the process, from gathering raw materials to final production, is designed to offer superior quality, consistent in every paver.



#### technical characteristics

With outstanding technical characteristics and exceptionally low maintenance, Archatrak **T30** porcelain pavers offer an excellent alternative to more traditional paving and exterior flooring products, including concrete, stone and wood.

T30 porcelain pavers posses the same exceptional technical characteristics of Archatrak's <sup>3</sup>/<sub>4</sub>" porcelain pavers, but with nearly three times the breaking strength. The surface and body of porcelain pavers are non-porous, ensuring zero liquid, oil or chemical absorption. T30 porcelain pavers are slip, scratch and stain resistant, fire and frost-proof, fade resistant and mold/ mildew resistant. Lastly, the light weight of porcelain allows for easy transportation, delivery and installation in comparison to concrete paving slabs and paving stones.

frost proof

slip resistant

stain resistant

fade resistant

fade resistant

stronger than stone

thermal shock resistant

fire proof

scratch resistant

mold & mildew resistant

low maintenance

lighter than concrete

easy installation

### installation options

on-grade gravel, grass & sand









thinset & grout





pedestal support systems & rubber pads







### application & uses

especially suitable for:



high traffic areas shopping centers convention centers public plazas



 $\begin{array}{c} \textbf{rooftops} \\ \textbf{bars } \vartheta \ \textbf{restaurants} \\ \textbf{patios } \vartheta \ \textbf{terraces} \end{array}$ 



driveways & other high load-bearing areas




#### 13 Colors

Archatrak's T30 porcelain pavers take inspiration from natural materials with their rich, contrasting layers of color, distinctive grain patterns, variable textures, highlights and contrasts, subtle texturing, sparkling highlights and tonal variation.

Whether you're seeking a stone look, modern urban or even a cement like finish, you're sure to find a color and style that will accomplish your vision.

#### **3** Sizes

Archatrak's T30 porcelain pavers are available in 3 sizes:





### aeras







# bagnolo







### base




## basic ginevra






# bluestone grey








### cemento smoke








### mons










# moov grey



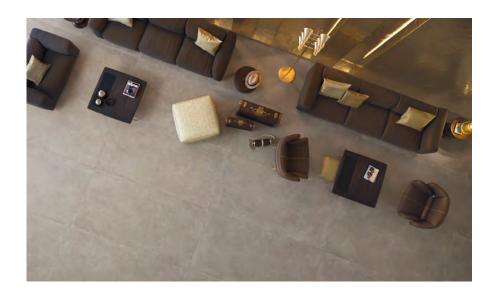



## moov moka











## pietra barge










# pietra basalto



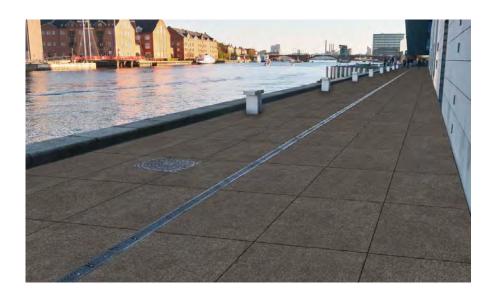



## slate black



## titanio






### technical specifications



Typical specifications for Archatrak T30 porcelain pavers are given below. Specifications may vary depending on the color/style of paver.

Please contact Archatrak for technical data on specific colors or styles.

property	standard	value
size	-	23 5/8" x 23 5/8"
thickness	-	1 1/8"
weight	-	13 ½ lb/sq.ft.
water absorption	10545/3	< 0.1
frost resistance	10545/12	resistant
breaking strength	10545/4	6520 lbf
modulus of rupture	10545/4	4700 psi
slip resistance	DIN51130	R11
thermal shock resistance	10545/9	resistant
chemical resistance	10545/13	resistant
bending strength	EN 1339	U25
static load	EN 12825	center > 3596 lbf side
		center > 2473 lbf
		diagonal > 4271 lbf



#### ARCHATRAK INC. 2 Wisconsin Circle Chevy Chase, MD 20815 866.206.8316 www.archatrak.com tileinfo@archatrak.com

